Semi-motorized and Fully-motorized microtomes parameter function comparison


Specification	S700 Semi-motorized microtomes	S700A Fully motorized microtomes
Туре		
Section thickness setting range: 0.50 - 100 μm	~	✓
Trimming section thickness setting range: 1 - 800 μm	✓	~
Electric speed: 0-1800µm	√	√
Specimen retraction: 0-250µm adjustable	√	√
Horizontal stroke: 28mm	✓	√
Vertical stroke:70mm	√	√
Specimen orientation: X/Y 8°	✓	~
Maximum specimen size: 55*50*30mm	V	√
W x D x H: 483mm×553mm×305mm	✓	✓
Weight	37.6kg	45kg
Fully automatic semi-automatic slicing mode switching		√
Emergency stop button		~
Slice window		~
Slice speed selection		~
Multiple slice modes		~
Pedals		~

RWD Life Science Co.,Ltd

Add: 2nd floor, Robeta Building, No.11 High Tech North 4th Road, Nanshan District, Shenzhen City, Guangdong Province, 518057, China Tel: (86)-755-86111286 ext 8283 Web: www.rwdstco.com E-mail: sales@rwdstco.com

RWD Life Science Inc.

Add: 6540 Lusk Blvd, Suite C161, San Diego, CA 92121 Tel: (858)900-5879 E-mail: sales@rwdstco.com

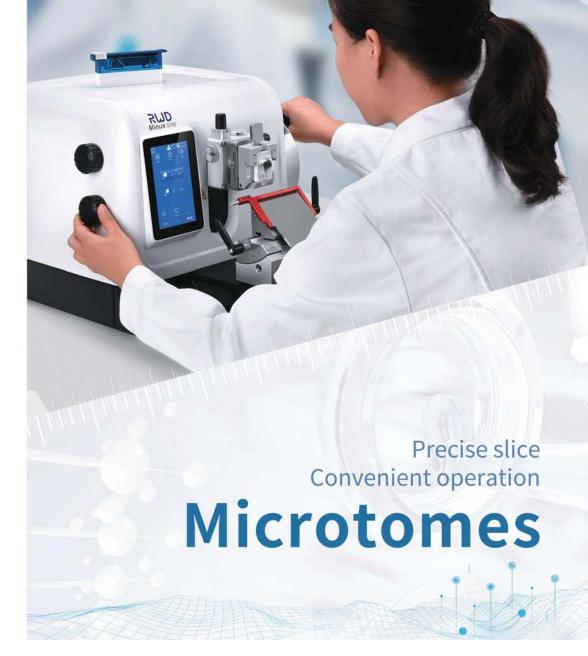

RWD

MICROTOMES





- · Precise motor stepping system for slice quality
- Adjustable speed for better sample control (0-1800um/s)
- Patented visual pointer mark to keep samples at the same angle for accurate sample positioning

Convenient

- · Friendly design with side knob
- 5-inch capacitive touch screen for easy operation
- Stylish and simple operation interface, easy to learn and understand

Safety

- Protective knife and retraction device to protect operator safety
- The remaining injection alarm promptly reminds the slice process to ensure smooth slice
- Double-locking system with handwheel for locking at any position and enhancing the protection of the operator

Intelligence

- Half knife repair function, simplifying the operation process
- · Sample position memory function for one-button reset to improve slice efficiency
- Historical record system, which can query device usage and facilitate information tracking